


XETK-S21.0

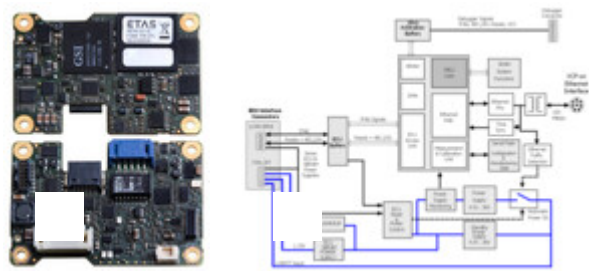

CPU interface

Supported processors	NXP* MPC57xx and ST Microelectronics SPC/EMU57xx/58xx and SPC58x families (* former Freescale)
----------------------	--

For a complete list of supported microprocessors, please refer to the product's User's Guide.

Configuration	Project-specific configuration for memory configurations stored in EEPROM
---------------	---

Board

Dimensions (HxWxD)	approx. 10.54 x 60 x 40 mm / 0.415 x 2.362 x 1.575 in
--------------------	---

Power supply

Input voltage	4.3 V to 36 V
---------------	---------------

Cranking voltage < 3 sec: 3V

Input current at 12 V	approx. 135 mA normal operation
-----------------------	---------------------------------

approx. 35 mA normal stand-by

Memory emulation

Emulation memory Processor-specific

Measured data
memory Processor-specific

Host interface

Serial interface 100 Mbit/s

Double-shielded line, max. 30 m/100 ft


Electrically isolated

Operation temperature

Temperature range -40 °C to +110 °C / -40 °F to +230 °F

This product has been developed and released for use in automotive applications. For usage in other domains please contact your ETAS representative.

Ordering Information

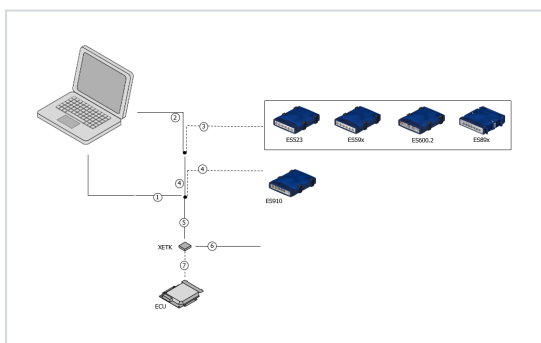

1 – Ethernet PC Connection


2 – Ethernet PC Connection - Adapter Cable

3 – Ethernet Connection - Adapter Cable

4 – Ethernet Connection

- 5 – XETK Connection
- 6 – Power Supply Connection
- 7 – ECU Connection

Order Name	Short Name	Order Number
XETK-S21.0		
XETK-S21.0B Emulator Probe for the NXP* MPC57xx and ST Microelectronics SPC/EMU57xx/58xx and SPC58x microcontroller families	XETK-S21.0B	F-00K-109-271

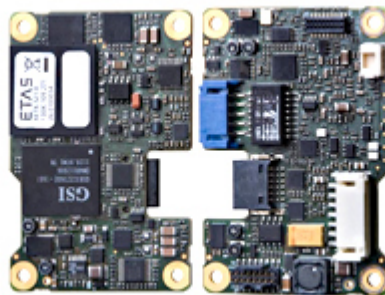

Optional Accessories

1 – Ethernet PC Connection

Ethernet PC Connection Cable 1 Gbit/s, Lemo 1B FGE - RJ45 (10mc-8mc), 3 m	CBE200-3	F-00K-104-373
--	----------	---------------



Ethernet PC Connection Cable 1 Gbit/s, Lemo 1B FGE - RJ45 (10mc-8mc), 8 m	CBE200-8	F-00K-104-374
--	----------	---------------



2 – Ethernet PC Connection - Adapter Cable (CBAE200)

Ethernet Connection Adapter Cable 1 GBit/s, Lemo 1B PHE - RJ45 (10fc- 8mc), 1m2	CBAE200-1m2	F-00K-105-760
--	-------------	---------------



3 - Ethernet Connection - Adapter Cable (CBAE330)

(ES523, ES59x, ES600.2, ES88x, ES89x)

Ethernet Connection Adapter Cable 1 GBit/s to 100

MBit/s, Lemo 1B PHE - Lemo 1B FGF (10fc-8mc),

CBAE330-0m5

F-00K-105-759

0m5



4 - Ethernet Connection

(ES523, ES59x, ES600.2, ES88x, ES89x, ES910)

Ethernet Connection Cable 1 GBit/s, Lemo 1B FGE -

Lemo 1B FGE (10mc- 10mc), 3 m

CBE230-3

F-00K-105-757



Ethernet Connection Cable 1 GBit/s, Lemo 1B FGE -

Lemo 1B FGE (10mc- 10mc), 8 m

CBE230-8

F-00K-105-758



5 - XETK Connection


XETK ECU Adapter Cable, 100 Mbit/s, Shield on

ECU-Housing, Lemo 1B HME - JST PHR (10fc-5fc),

CBAM230-0m38

F-00K-105-791

0m38



XETK ECU Adapter Cable, 100 MBit/s, Lemo 1B PHE


- JST PHR (10fc-5fc), 0m6

CBAM240-0m6

F-00K-105-792




XETK ECU Adapter Cable, pre-assembled into PG9 screwing, shield on ECU- Housing, Lemo 1B PHE - CBAM271-0m5 F-00K-107-867
 JST PHR (10fc-5fc), 0m50




5&6 – XETK and Power Supply Connection

XETK ECU Adapter and Power Supply Cable, pre-assembled into PG9 screwing, shield on ECU- Housing, Lemo 1B PHE - JST PHR (10fc-5fc) / Lemo CBAM270-0m5 F-00K-107-866
 0B PHG - JST PAP (2fc-2fc), 0m50

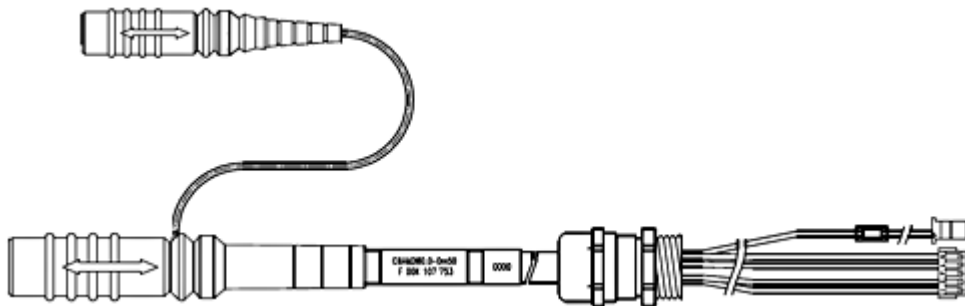

XETK ECU Adapter and Power Supply Cable, pre-assembled into PG9 screwing, shield on ECU- Housing, Lemo 1B PHE - JST PHR (10fc-5fc) / Lemo CBAM270-0m7 F-00K-108-479
 0B PHG - JST PAP (2fc-2fc), 0m70

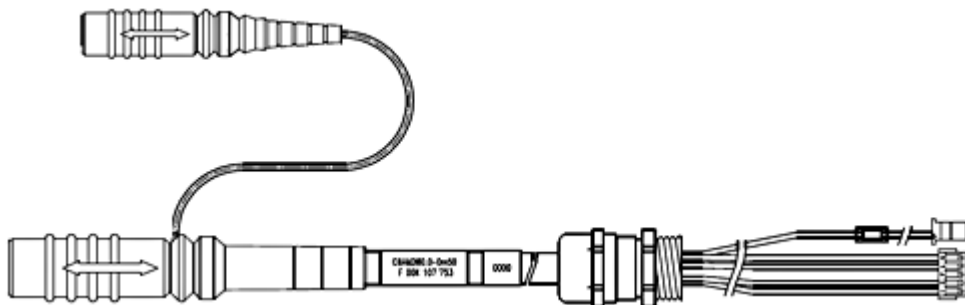


6 – Power Supply Connection

ETK Power Supply Cable for External Supply, with KA50 F-00K-000-940
 Filter Coil, Lemo 0B EGG - open wire (2fc-1c), 0m2



External Power Supply Cable for ETKs, Lemo 0B - FGG open wires (2fc-1c), 2 m	K70.1	F-00K-109-270
--	-------	---------------



7 – ECU Connection

ETAI10 ETK ECU Flex Adapter, Erni - Samtec (12fc - 10fc), 0m136	ETAI10	F-00K-107-954
---	--------	---------------


ETAI5 ETK ECU Adapter with short ED supply and GND lines, JST PHR - open wires (7fc - 2c+5c), 0m25	ETAI5	F-00K-106-773
--	-------	---------------

ETAI6 ETK ECU Adapter, JST PHR - JST PHR (7fc - 5fc), 0m1	ETAI6	F-00K-107-195
---	-------	---------------

ETAI8 ETK ECU Adapter, JST PHR - JST PHR (7fc - 7fc), 0m1	ETAI8	F-00K-107-757
---	-------	---------------


Debugger Connection

Debug Adapter from Debugger to ETK-S2x	ETAF11.0	F-00K-107-682
--	----------	---------------



Housing

Water-proof case, designed for ETK-S4.x, ETK-S6.x and ETK-S2x	ETKS_C3	F-00K-107-683
---	---------	---------------



ECU Connection Protection Cap (for CBAM230, CBAM240)

Cap to protect open Lemo 1B sockets against dirt,
cost effective

CAP_LEMO_1B_LC F-00K-105-683



Note: This list contains only a selection of available adapters. A comprehensive overview is available in the User Guide of each ETK.

